


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description
------	-----------	-------------	-------------------

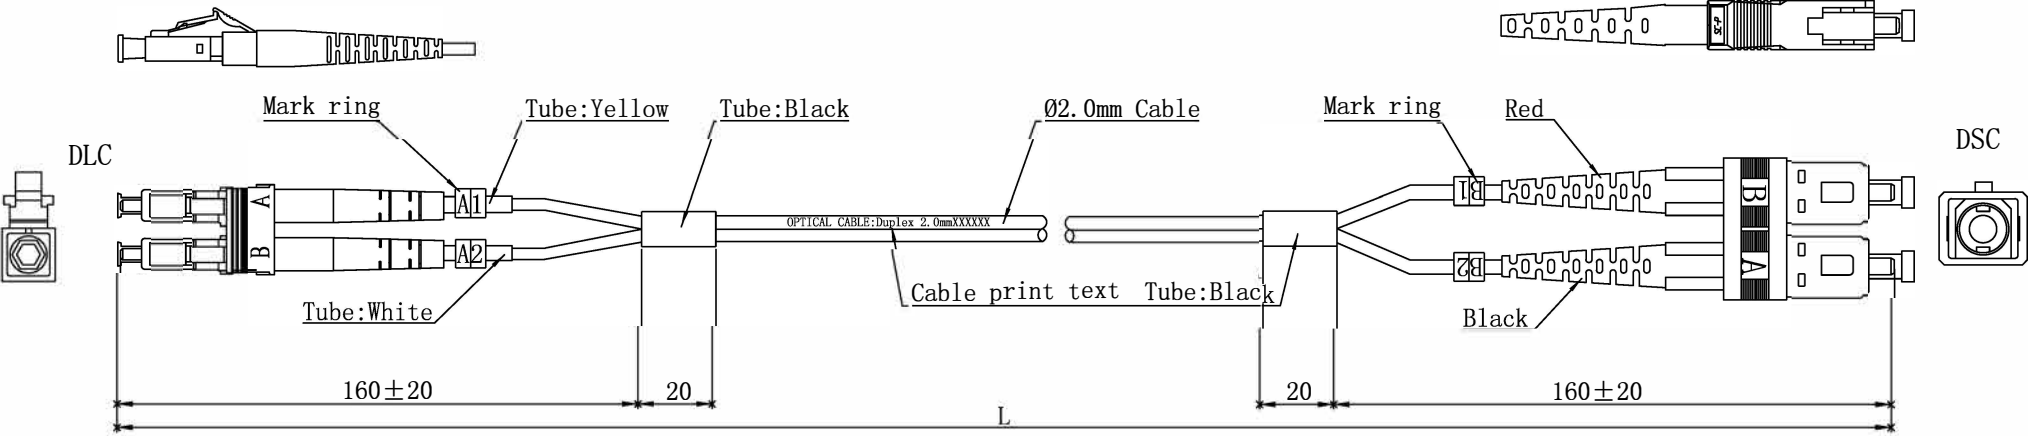


Specifications:

Type	DLC/UPC-DSC/UPC
Fiber Mode	OM1
Core Diameter(um)	62.5/125
Operating Wavelength(nm)	850/1300
Cable Color	Orange
Cable Diameter(mm)	Ø2.0
Operating Temperature(° C)	-40~+75
Storage Temperature(° C)	-40~+85
Insertion loss(dB)	≤0.2dB
Return loss(dB)	≥35dB
SC Connector Color(Boot)	Red/Blcak

$L \leq 5m$, TOLERANCES: $0 \leq \Delta L \leq 5cm$
 $L > 5m$, TOLERANCES: $0 \leq \Delta L \leq 1\%*L$

Remarks:

Length	Item #
0.3M	LCSC0.3
1M	LCSC01
2M	LCSC02
3M	LCSC03
5M	LCSC05
7M	LCSC07
10M	LCSC10
15M	LCSC15

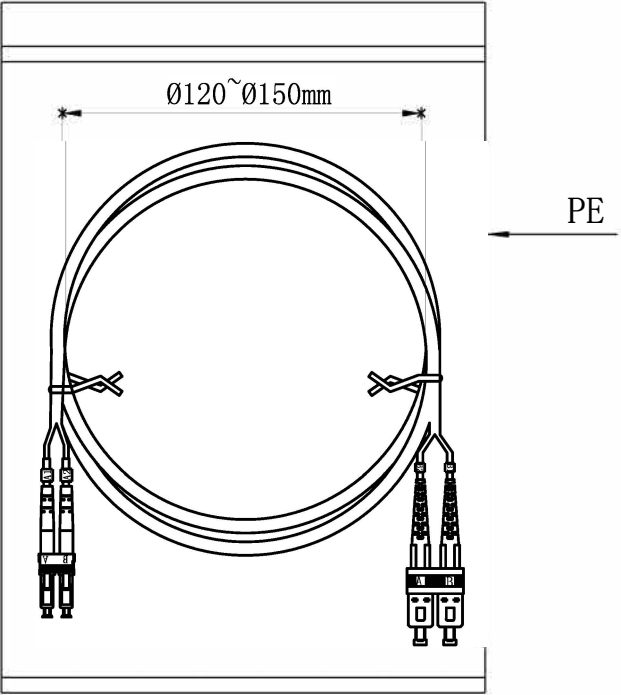

LANshack
Sales@LANshack.com | 888-568-1230

①				
②				
③				
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

Unless specified on the drawing,
tolerances are per the follows:

.X +1
.xx +0.2
+0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: LC-SC-DX OM1 Patchcord
CHECKED BY	SHEET 1of1	ITEM NO. SFPC-OM1-LCSC-XX
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm