

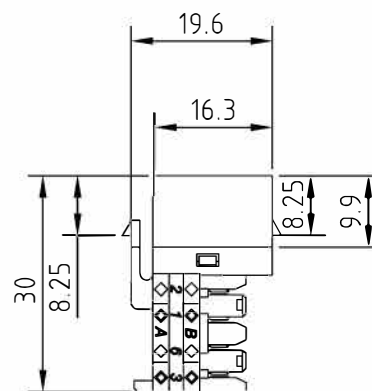




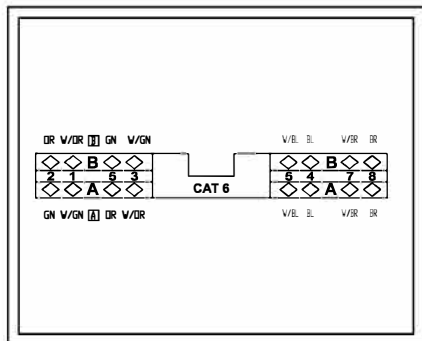

TAA COMPLIANT

MATERIAL


KEYSTONE JACK HOUSING: ABS UL94V-0 THERMOPLASTIC
IDC PLASTIC: POLYCARBONATE RESIN HIGH IMPACT UI94V-0 THERMOPLASTIC
IDC CONTACT: PHOSPHOR BRONZE C5191R-H, T, 0.4MM, 200U" TIN OVER SOLDER UNDERCOAT
SPRING 111RE: PHOSPHOR BRONZE C5211MH, T-Q35MM, 6U" GOLD OVER 600" NICKEL UNDERCOAT ON CONTACT AREA, 1000" TIN OVER 600" NICKEL UNDERCOAT ON SOLDER AREA

PHYSICAL CHARACTERISTICS

SLITABLE IMPACT TOOL: 110 STYLE PUNCH DOWN TOOL
INSERTION LIFE: 750 MATING CYCLES WITH FCC COMPLIANT RJ45 PLUG.
CONTACT FORCE: 100 GRAMS 111TH FCC COMPLIANT RJ45 PLUG.
PLUG RETENTION FORCE: 11 LBF MIN.
DURABILITY: 200 TERMINATION CYCLES.
CONTACT COMPATIBILITY: ACCOMMODATES 23 TO 26 AWG SOLID / STRANDED.
OPERATING TEMPERATURE RANGE: -10
STORAGE TEMPERATURE RANGE: 40
HUMIDITY: 10%-90% RH.


ELECTRICAL

INSULATION RESISTANCE: 500 MO.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC.
DC CURRENT RATING: 1.5 Amps.
DC RESISTANCE: 0.10.
CONTACT RESISTANCE: 20mΩ. ESISTANCE: 20mΩ. CT RESISTANCE: 20mΩ.

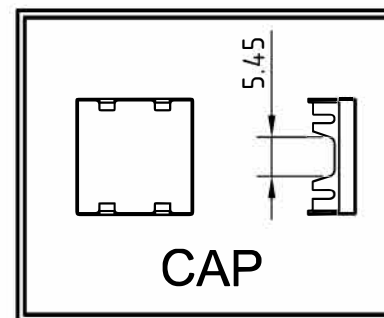

CAP

SUGGESTED MOUNTING CUTOUT

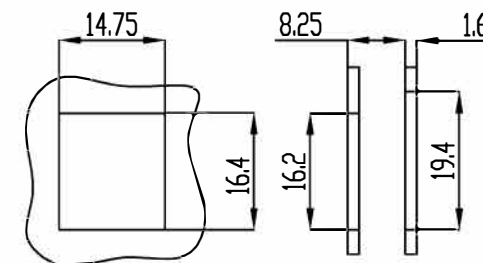

Scale	1:1	All Copy Rights Reserved			
3rd Angle Projection		LANshack Sales@LANshack.com 888-568-1230			
Unit	mm	Title QUICKTREX CAT 6 KEYSTONE JACK A4			
Date	2011/11/4	PART # QT-110KST-6B-G-XX			
Tolerance		Drawn by	Checked by		
-20	-50	J.U.			
± 0.2	± 0.4				
-150	150~				
0.5	± 1.5				
ANGLE	± 2°				