
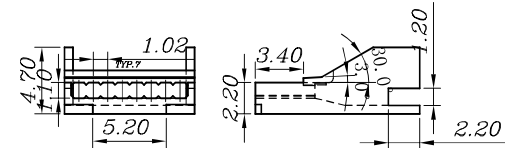



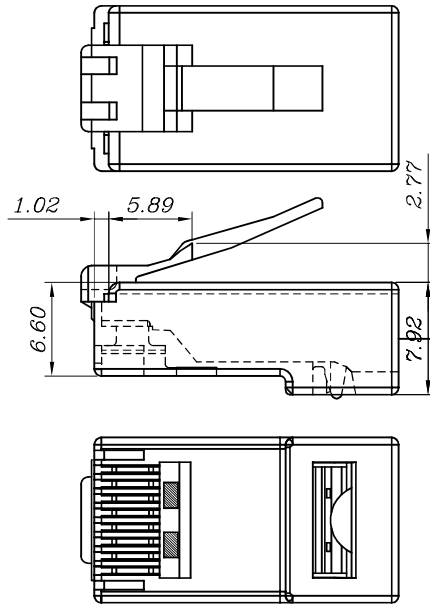


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REV	DATE	MODIFICATION	DRAWN

SPECIFICATIONS

- ELECTRICAL:**
UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS AC.
INSULATION RESISTANCE: 500 M Ω .
TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.
- MECHANICAL:**
CABLE-TO-PLUG TENSILE STRENGTH : 20POUND MIN.
DURABILITY : 1200 MATING CYCLES.
- MATERIAL & FINISH:**
HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: COPPER ALLOY.
CONDUCTOR : SOLID WIRE , 23AWG, 24 AWG.
(It can be used for the wire OD from 0.96-01.02)
GOLD PLATING: 3u"-50u", ARE AVAILABLE.




BLADE:	E	EB	Y	YB	Z	A	AE	AB	EC	AL	ZL	YBL
Drawing												
Mark					✓							
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND	FLAT			
Mark						✓	Mark	✓				

Purchase at

LANshack

Sales@LANshack.com | 888-568-1230

DRAWN BY	DATE: 2017/12/27	DESCRIPTION: C6R5Z50V2IL-3P(RJ45 Cat.6A UTP Plug Stranded and Solid 50 Micron 3pc type	
CHECKED BY	SHEET 1 of 1	ITEM NO. C6A-US-MPWL-100	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm



ST-DR-009A